

# Slim sliding door operator Besam SL500 SL

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in  
door opening solutions



The modular sliding door Besam SL500 SL enables upgrades and add-ons when you want to move your business forward

## Sustainable entrances

You can be sure that your entrance suits your people flow as well as your environmental footprint. To make your entrance more sustainable we can offer you different solutions as: additional sealing (Besam TightSeal), sustainable drive mode, intelligent opening width depending on traffic, inner- and outer door air locking, and timer settings and more.

## Safety first

To permit safe passage between closing doors, the doors go into reverse mode if an obstruction is detected, and then start moving again slowly to check if the obstruction has cleared. If an obstruction is detected during opening or between opening doors and surrounding walls or interior fittings, the doors immediately stop and then close after a time delay. The speed and force of the doors can be customized to optimize safety. For optimum safety and user convenience, use a monitored ASSA ABLOY presence-detection system.

## Technical specifications



Operator dimensions	100 mm x 198 mm (height x depth)
Power supply	100-240 VAC $\pm$ 10% 50/60 Hz
Power consumption	max. 250 W
Recommended maximum door weight	
Besam SL500 SL-2 without break-out	200 kg/door leaf
Besam SL500 SL-2 with break-out	100 kg/door leaf
Besam SL500 SL-1 without break-out	240 kg
Besam SL500 SL-1 with break-out	100 kg
Clear opening width (COW)	
Besam SL500 SL-2	1000 – 3000 mm (bi-parting)
Besam SL500 SL-1	800 – 3000 mm (single slide)
Contact local sales representative for other dimensions.	
Open and closing speed	up to 1.7 m/s (2 leaves) variable
Hold-open time	0 – 60 s
Ambient temperature	-20°C to +50°C
Relative humidity (non-condensing)	max. 85%

## Security

Choose your security level by adding different features. Unwanted guests are not an issue for the Besam SL500 SL through the use of different locking devices. The operation mode selector can be set to meet your security needs during and outside business opening hours. Interlocking facilities further enhance the security level.

## Service and maintenance for your convenience

Ensure that you are one step ahead of breakdowns via maintenance indicators and automated diagnostics, or let us handle your maintenance via ASSA ABLOY Entrance Systems' tailored maintenance programs.

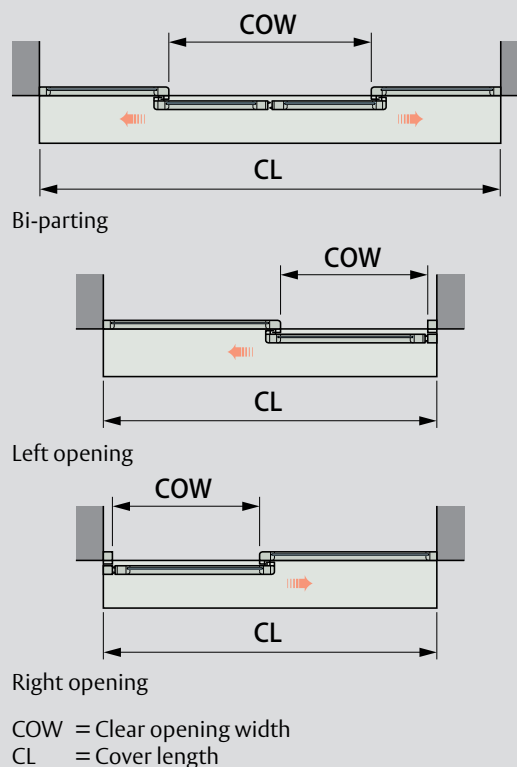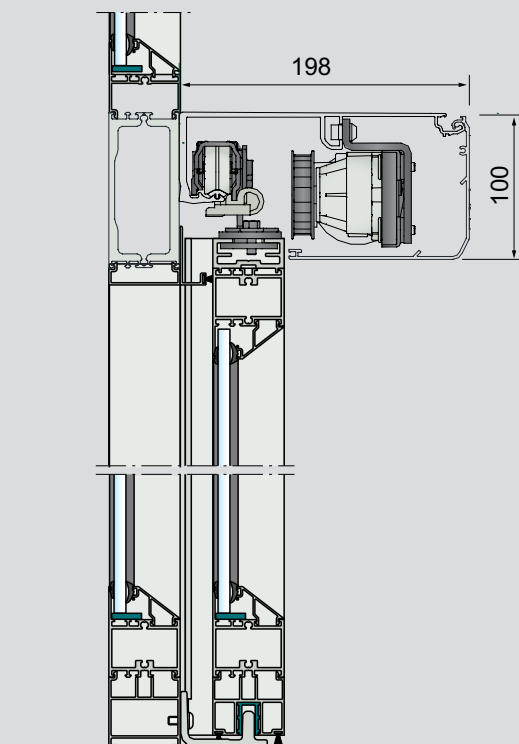

### Appealing aesthetics

The Besam SL500 SL further enhances the aesthetics of your automated entrance with a cover only 100 mm high. Thanks to the sleek design of the operator, state-of-the-art operation mode selectors well as smooth and quiet operation, the Besam SL500 SL ensures both convenience and appeal to pedestrians.

### Models

**Besam SL500 SL-2** - Two leaves, bi-parting, with or without break-out

**Besam SL500 SL-1** - One leaf, single-slide, right or left-opening, with or without break-out

### Standard equipment

Cover: clear anodized aluminium

Support beam with transmission

Electronic control unit with plug-in connections and power supply

### Accessories and options

Cover: Other anodizing options or supplied painted in RAL colours

Door adaptor for doors up to 65 mm thick from other suppliers

Traffic-controlled opening width

Synchronizing of two operators

Operation mode selectors

Electronic emergency opening or closing unit

Break-out door

Emergency button

ASSA ABLOY motion and presence sensors

Electrical locking devices

Interlocking between operators

Key switch

Besam automatic door systems

This equipment should be installed, regularly inspected, maintained and serviced by trained and authorized personnel. Preventive maintenance plans are highly recommended for a proper and safe operation. Talk to your ASSA ABLOY Entrance Systems representative to learn more about our service offering!